INSTRUCTIONS

INSTRUCTIONS:

1. Shut off water and disconnet supply line hose.
2. Remove old faucet nut.

To install slide & lock nut:

3. Push new black washer seal all the way up.
4. With flat surface facing up, position blue piece to the right joining inner threads. Slide nut up flush against washer. Rotate clockwise until blue piece slides into lock position.
5. Reconncect supply line hose and turn on water supply.

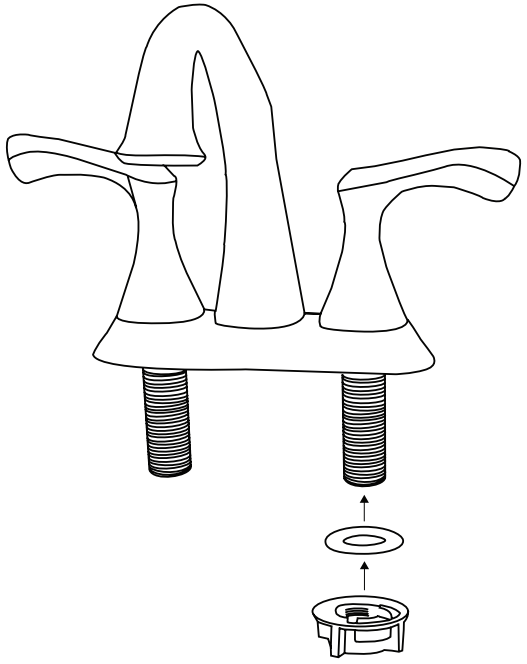

INSTRUCCIONES:

1. Cierre el suministro de agua y desconecte la manguera de suministro.
2. Retire la tuerca vieja de el grifo.

Para instalar la nueva tuerca

3. Empuje la nueva arandela negra hasta arriba.
4. Con la superficie plana hacia arriba, coloque la pieza azul a la derecha juntando la rosca interior. Deslice la tuerca hacia la arandela. Gire hacia la derecha hasta que la pieza azul se deslice en posición de cerrado.
5. Reconecte la manguera de suministro de agua y abra el suministro de agua.